

# ssm2164\_seppoman pcb - getting started - how to setup

the following informations are take from the midibox forum, its a collection of infos, without the claim to be 100% true, i will try to test the given information.

## Power

+ GND -

J5 is obviously the only connector where you could come to the conclusion that it might have something to do with power supply. Just like the:

AOUT(NG), the 2044 board, the MB\_FM module etc, **it expects a bipolar power supply of +/- 12 V and GND.**

## CV

as a general rule of thumb you can assume that everything that doesn't specifically mention a bipolar control voltage will expect an unipolar CV.


In the case of this module, IIRC the dynamic range of the regular **CV range (0 .. 11.67V)** (uni-polar!) is about 65 dB, with 0V being "silence" and 11.67V being unity gain.

I have never thought about what happens if you apply a negative voltage to the CV input...

Note also that generally a bipolar control voltage (CV) still doesn't mean that there are more than two wires involved,  
just the one signal can be above or below GND.

## AOUT\_NG Connect and Setup

Unipolar Jumpering like shown:

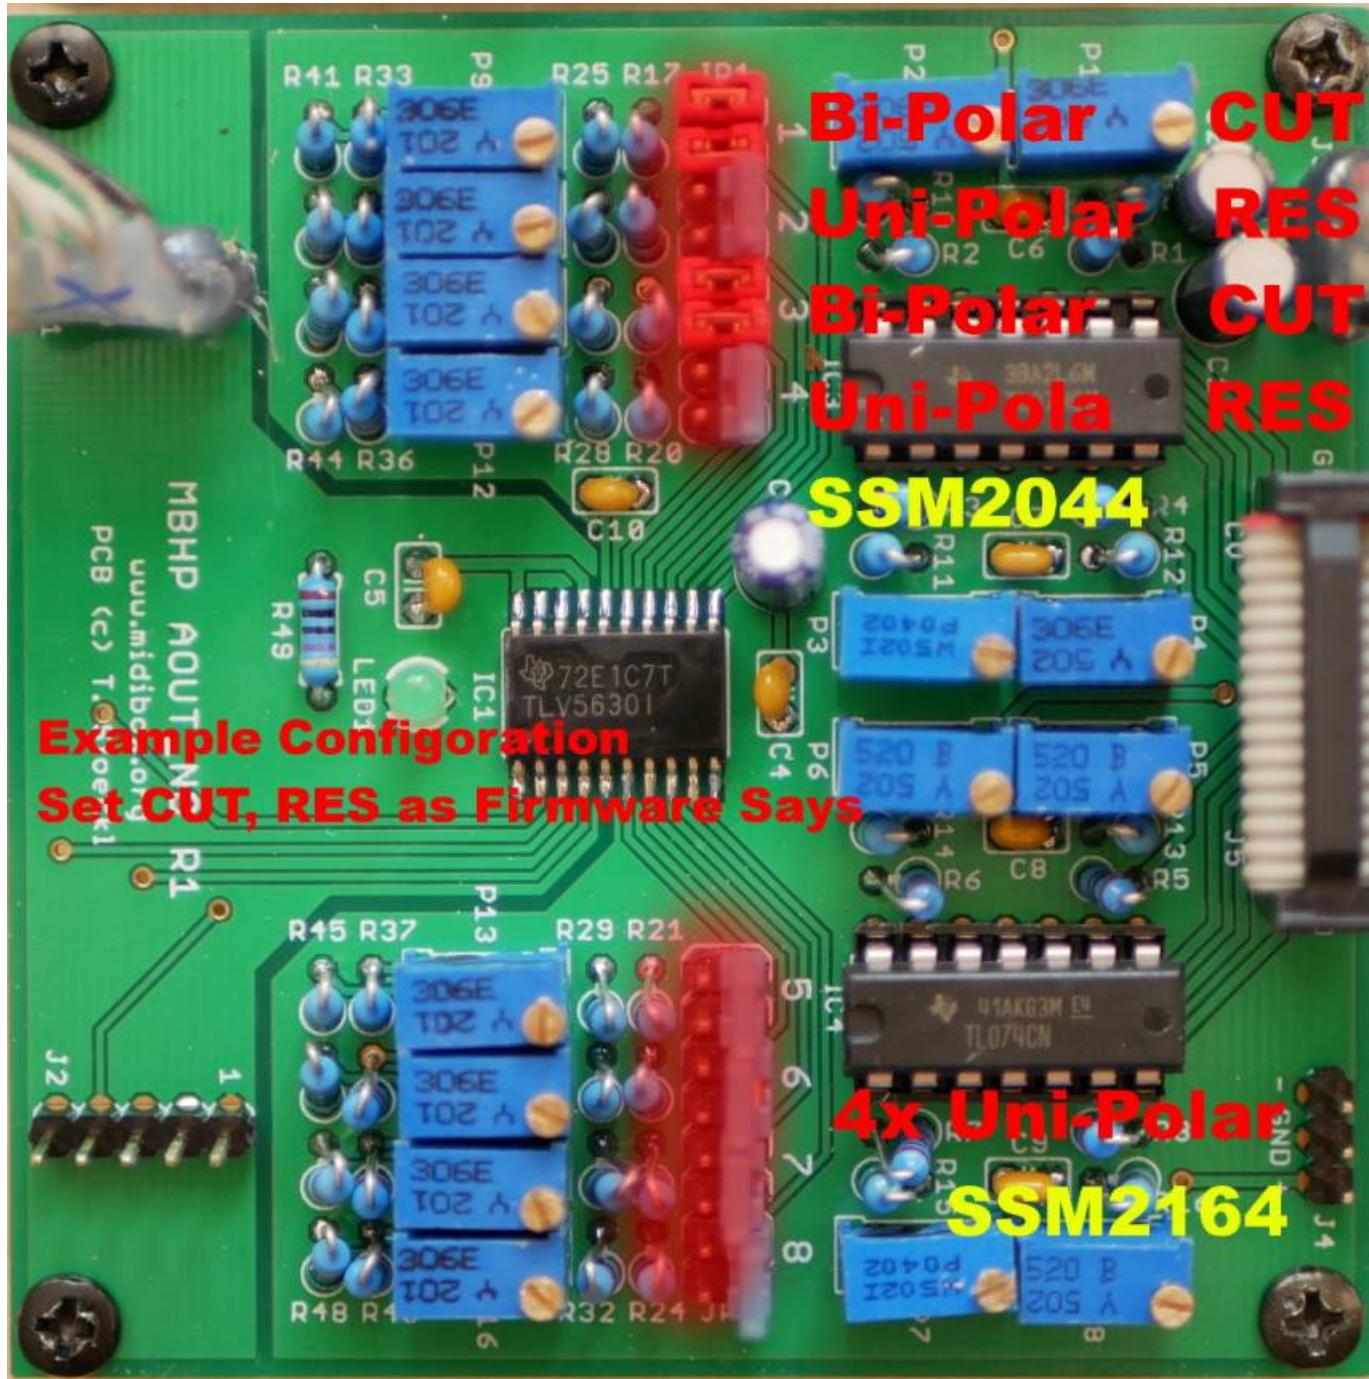

## AOUT\_NG Stuffing Parts PCB

### Resistor Solution stock - very low voltage

if you followed [aout\\_ng](#) built plan you will get following Stock-CV-Voltages @+-12V PSU:  
Uni-Polar CV-Range: 0-11,4V  
Bi-Polar CV-Range: +-3V

#### SSM2164 & Stock AOUT\_NG:

As the SSM2164 is UniPolar, and seppoman designed it as a couple with AOUT\_NG. stock is ok

#### SSM2044 & Stock AOUT\_NG:

As the CUT-Off-CV is UniPolar, and seppoman designed it as a couple with AOUT\_NG. stock is ok  
*I guess for proper +/- 5V operation I'll have to try out a few other resistor values on the SSM module, but this will only apply if you're using a different CV source than an AOUT\_NG.||*

**If you need more CV-Range:** for more distortion, drive, range, or other modules:

if you sum two voltages through two resistors of same value, you'll get  $(V1+V2) / 2$  as a result...

## Resistor Solution low voltage - seppomans prefered

**R9...R16 > 5.6k** (only on the channels that are setup for bipolar mode)

+3.5V to +5.8V Bi-Polar calibration range That should be sufficient as a hot fix, isn't too much effort and you'll still have a decent precision when calibrating.

## Resistor Solution high voltage

**R1...R8 > 10k**

**R9...R16 >2.2k** (on all channels). (QUESTION WHY ON ALL?)



**+9.5V to +22V** Uni-Polar calibration-range

**+2.4V to +5.5V** Bi-Polar calibration-range

**Pro:** preserve the “just change the jumpers if you need some channel in bipolar mode” thought behind this option.

**Con:**dramatically increase the calibration range, i.e. exactly calibrating the outputs will get harder because the same angle of turning the pot will have much more impact.

From:  
<http://midibox.org/dokuwiki/> - **MIDIbox**



Permanent link:

[http://midibox.org/dokuwiki/doku.php?id=ssm2164\\_getting\\_started&rev=1524488274](http://midibox.org/dokuwiki/doku.php?id=ssm2164_getting_started&rev=1524488274)

Last update: **2018/04/23 12:57**