

## The Becoming of the "Apparat 20"

("Apparat" is an old-fashioned german word for a telephone or also for the extension number of a phone.)

As I just started with my next MidiBox project, I thought this time I'll have to contribute a build blog. So here we go:

### Concept

The idea is to build a synthesizer together with a vocoder into an old telephone. This brings up a few considerations:

### Telephone

I really wanted a "Plug'n'Go" thing for stage use, so everything must fit into the phone. This means (of course) the phone needs to offer some space inside and has to look cool. I chose this phone - it's an 80ies phone built by SEL from the "design" line of the Deutsche Telekom. It emerged from a phone for disabled people, hence the really BIG dial buttons.



### Vocoder

The vocoder has to be as small as possible. Mostly, vocoding is found in (at least) 9.5" FX units. Standalone vocoders (like the MAM VF11 or DIY versions) are normally analogue and even bigger units. Then I found the Alesis Metavox - it's the smallest (14 x 8 cm) and also cheapest vocoder existing (got it for 30 EUR new). Most of its functions are not really useful for music, all around the

internal oscillator/LFO is more like a DJ toy. But the sound quality in external mode is quite good.



## Synthesizer

The carrier signal has to be polyphonic and should be quite brilliant to achieve good vocoder results. At first, I thought about using a MBSID but quickly rejected this idea. It's only polyphonic with (mostly boring) single oscillator sounds, and the higher frequencies are not really present. Even more, The vocoder would have to be used with the normal filter switched off, so a great part of the SID character would be gone anyway. So the choice is the MB FM.

## "User Interface"/Features

My central objective is that the finished Apparat 20 should just look as much as possible like an ordinary phone. So there won't be a display or any additional CS elements for the MBFM. Up to 20 patches will be selected via the normal dial keys (1..0, and you can select two "banks" with # and \*). I can imagine some of you saying "But you can't edit anything and wouldn't it be cool to have this or that parameter accessible in live performance?". Of course it would, but I'm building a big MBFM for home use anyway, and there's always JSynthLib...


The vocoder has only one single parameter to modify when external mode is selected (Sibilance, i.e. how much high frequency of the original signal will bleed thru, i.e. consonants). The corresponding pot will be mounted hidden beneath the pickup. The pickup will switch on and off the vocoder bypass and will get an electret capsule and a simple mic pre.

## Build Blog

This is what the phone looks like inside - you can see there's quite some room in there.




After throwing everything out, I examined the keyboard to find out how to use it.

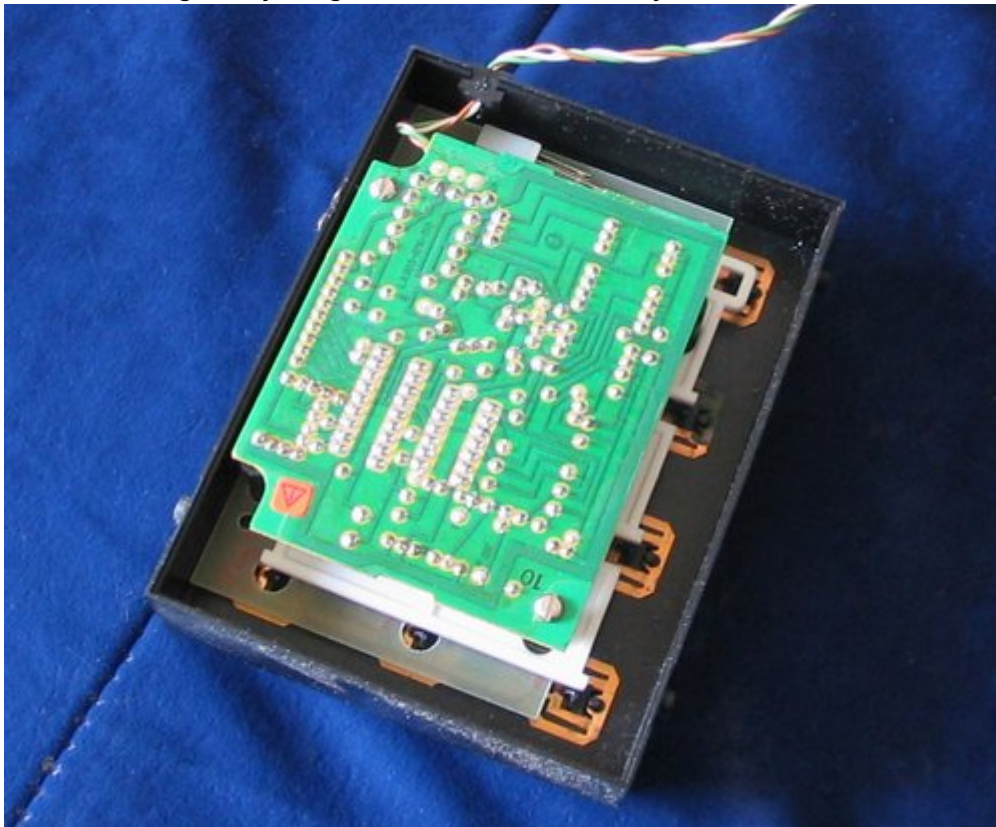


Under the control board there is a simple 4x3 button matrix (without diodes - but that's no problem, it


won't be necessary to press more than one button at the same time).

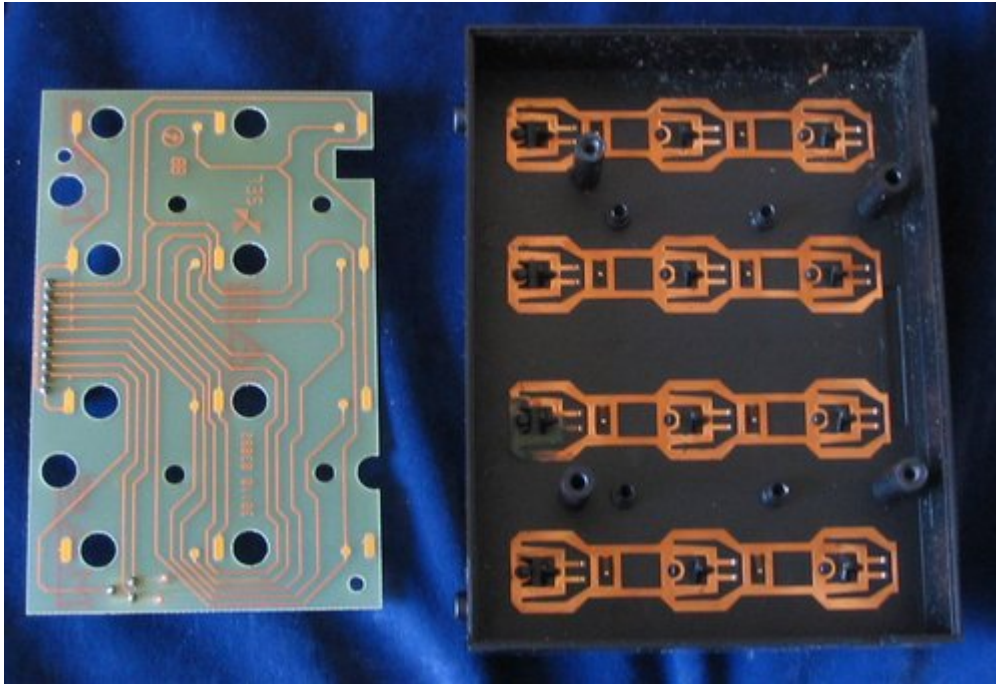

Because the contacts for the # and \* buttons were not connected, I had to solder a few thin wires and I rewired the connector:

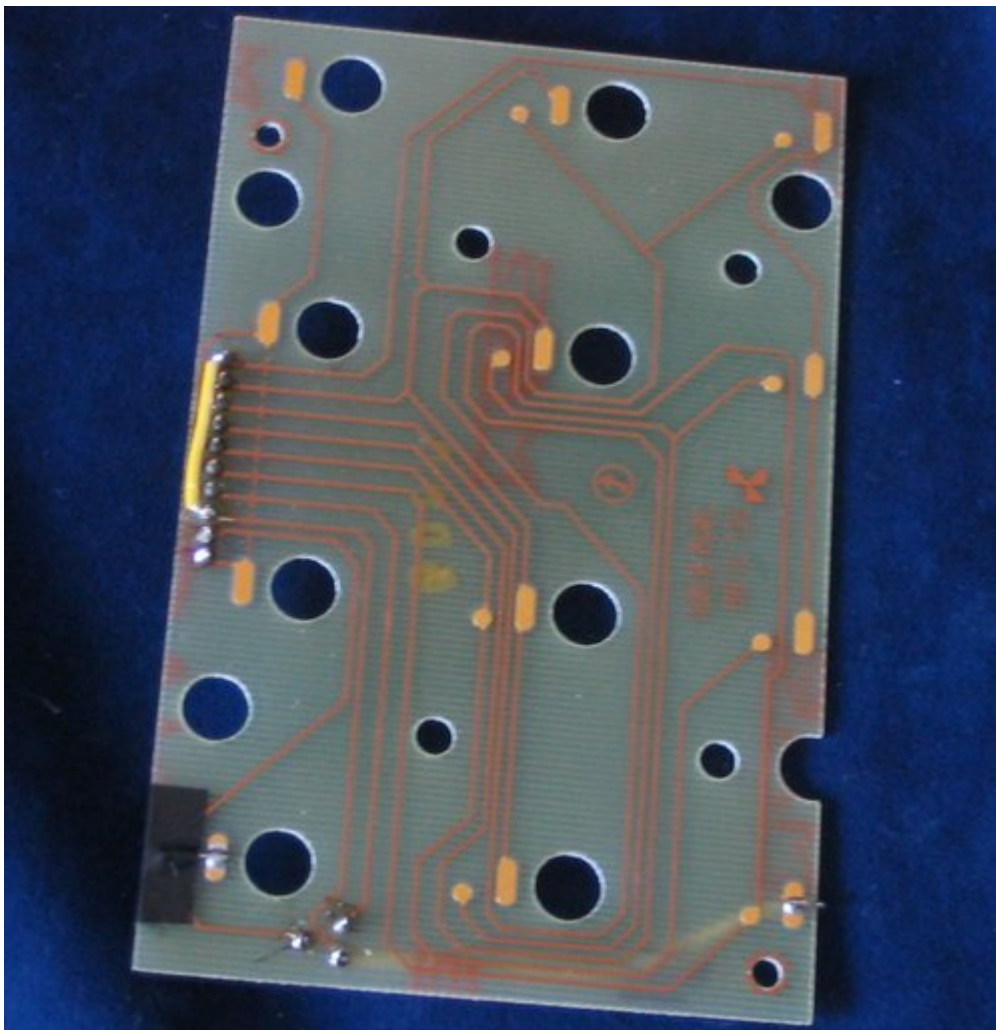



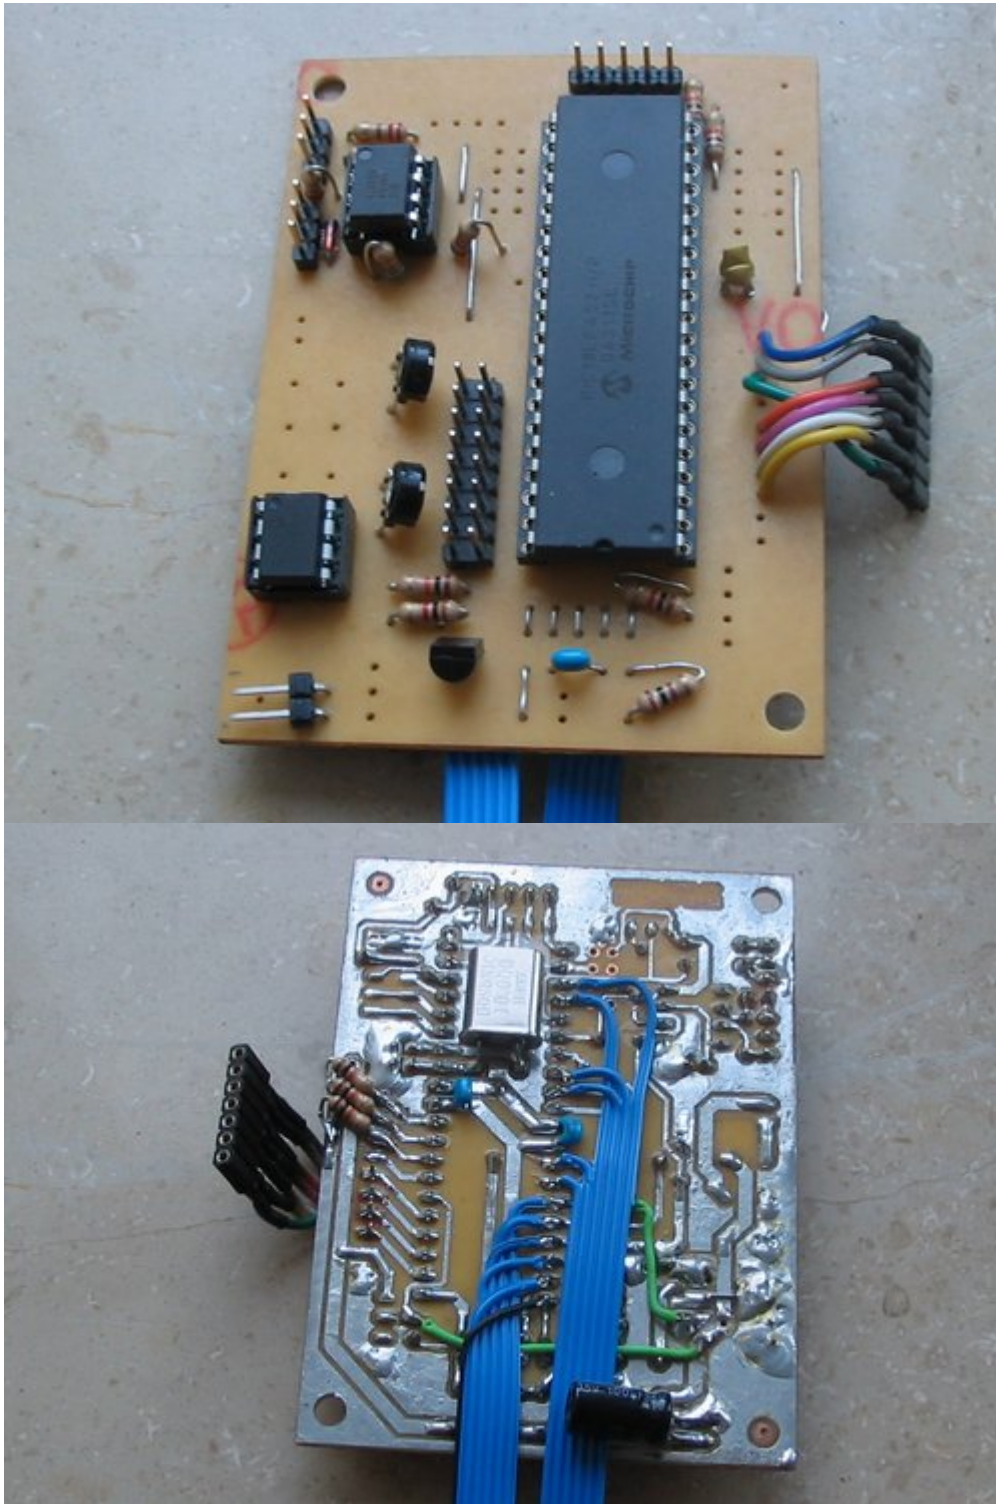



### Software changes for the matrix keyboard

So now I had a keyboard with integrated core - how to scan the key matrix? There are the sm\_examples from Thorsten, but the FM has hardly any RAM left and it's also preferable not to use too much processing power. Debouncing is not necessary, because every button press is a single key action and it doesn't hurt if the same Program Change is executed a few times. So I chose to do my own simple matrix scan.

We need a few preparations: First, I defined the two variables MATRIX\_BUTTON and MATRIX\_LAYER. Then at the end of USER\_Init (main.asm) I inserted this:

```
;; ----- prepare scan matrix -----  
  
;; disable the ADC which allocates the analog pins  
movlw    0x07  
movwf    ADCON1  
  
;; Initialize J5 (PORTA 0..3,5 output, PORTE 0..2 input)  
bcf TRISA, 0    ; Pin RA.0 = output  
bcf TRISA, 1    ; Pin RA.1 = output  
bcf TRISA, 2    ; Pin RA.2 = output  
bcf TRISA, 3    ; Pin RA.3 = output  
bcf TRISA, 5    ; Pin RA.5 = output  
bsf TRISE, 0    ; Pin RE.0 = input  
bsf TRISE, 1    ; Pin RE.1 = input  
bsf TRISE, 2    ; Pin RE.2 = input
```

```
;; set initial state
bcf LATA, 0
bcf LATA, 1
bcf LATA, 2
bcf LATA, 3
movlw 0x00
movwf MATRIX_BUTTON
movwf MATRIX_LAYER
;; ----- end modification -----
-

#if CS_ENABLED
    ;; reset the control surface
    goto CS_MENU_Reset
#else
    return
#endif
```

The scanning is done in cs\_menu\_timer.inc. The following code is inserted at the beginning of the CS\_MENU\_TIMER function:

```
CS_MENU_TIMER

;; ----- scan button matrix -----
-----
;; rows on PORTE (with 10k PullDown resistors)
;; cols on PORTA (0..3)

movlw 0x00

bsf LATA, 3
IFSET PORTE, 0, movlw 0x01
IFSET PORTE, 1, movlw 0x02
IFSET PORTE, 2, movlw 0x03
bcf LATA, 3

bsf LATA, 2
IFSET PORTE, 0, movlw 0x04
IFSET PORTE, 1, movlw 0x05
IFSET PORTE, 2, movlw 0x06
bcf LATA, 2

bsf LATA, 1
IFSET PORTE, 0, movlw 0x07
IFSET PORTE, 1, movlw 0x08
IFSET PORTE, 2, movlw 0x09
bcf LATA, 1

bsf LATA, 0
```

```

IFSET PORTE, 0, movlw 0x11
IFSET PORTE, 1, movlw 0x0A
IFSET PORTE, 2, movlw 0x10
bcf LATA, 0

movwf MATRIX_BUTTON

;; ----- end modification -----
-

decfsz CS_MENU_TIMER_CTR, F; since this routine is called every 1 ms,
but the cursor
;; ...

```

Here MATRIX\_BUTTON is set to a value greater 0 while a key is pressed. The result is then processed at the end of each USER\_TICK in the main.asm:

```

;; ----- Program Change on key press -----
-

movlw 0x00          ;; Button pressed?
cpfszt MATRIX_BUTTON
return

movlw 0x0f          ;; Yes -> * or # ?
cpfszt MATRIX_BUTTON
goto PATCH_SEL

movlw 0x10          ;; Yes -> select layer (1..10/11..20)
cpfszt MATRIX_BUTTON
goto PATCH_10

movlw 0x00          ;; 1..10
movwf MATRIX_LAYER
return

PATCH_10           ;; 11..20
movlw 0x0A
movwf MATRIX_LAYER
return

PATCH_SEL          ;; Normal patch selection
movf MATRIX_BUTTON, W
addlw (-1)
movwf MIOS_PARAMETER2

movf MATRIX_LAYER, W          ;; Add layer
addwf MIOS_PARAMETER2

movlw 0xC0           ;; Program Change Ch 1
movwf MIOS_PARAMETER1
call MBFM_MIDI_NotifyReceivedEvent

```

```
;; ----- end modification -----  
-  
return
```

From:  
<https://midibox.org/dokuwiki/> - **MIDIbox**

Permanent link:  
[https://midibox.org/dokuwiki/doku.php?id=apparat\\_20\\_construction\\_blog&rev=1153497996](https://midibox.org/dokuwiki/doku.php?id=apparat_20_construction_blog&rev=1153497996)

Last update: **2006/10/15 09:35**

