


MSQ-CC-BCR

MotionSeQuencer for ControlChanges for BCR2000 by wiring it to MBHP
Synth-Patch-Editor & Motion-Sequencer 4 ControlChange (= CC-Automation)

(Feature Set)



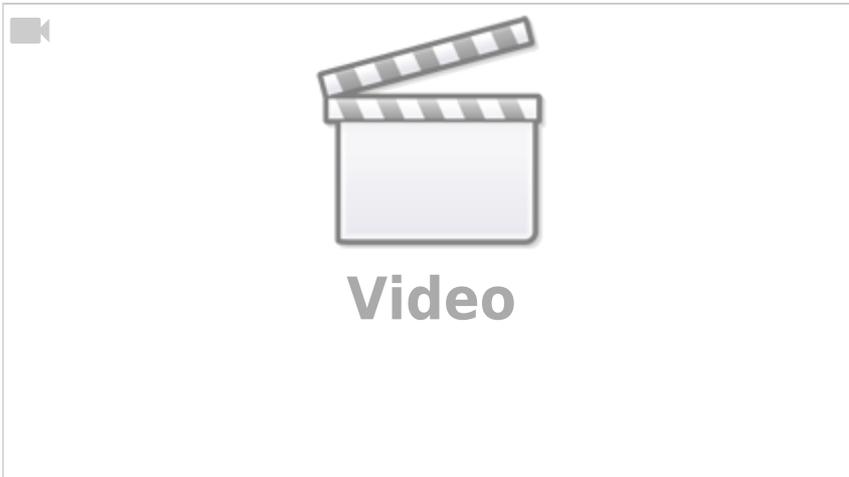

Introduction

i have the need to control and automate my Nord Drum2 [NORD DRUM 2](#)

So i connect a BlackBox between Sequencer & Synthesizers...

This Box is called MSQ_CC_BCR: **M**otion **S**equencer for **M**idi**C**ontrol**C**hange controlled via a **BCR2000** Midicontroller

It acts as:

- **Midi Merger** NTE,CLK,PC merge with CC... & CCinput is a thing between MSQ_CC_BCR and BCR only since we have intelligent UI with Pages..

- **Patch Manager** it replaces the Synths internal Patch Storage, to even get more, because, each PC event from your Sequencer is multiplied by the BANK CC (CC 32)...

- **Motion Sequencer** Record your Controller Movements in a Sequence in 32th Resultion @ maximal 256 Steps length

64th is possible, just a Factor in the code, but it will also reduce the max.Step length to 128 steps, also the midi traffic will go HI! imagine you automate $8 \times 32 = 256$ CCs, and dump that @64th into your synth, over midi... ;)... but in cases like: drumcomputers, where a much things must be static to provide the percussive punching sound - there are normally not that much automations... so maybe for a drummachine 64th is a good yoice, but in my experience with a nord drum 2 (for which i have written the programm) in my expirience 64th is to high..... how ever i get lost in detail... =====

Features ===== - **Remote your Synths** by: *8x Midichannels with up to 32x Control Change (CC) For the BCR i only can provide 8×29 , because i need some controlls to control the MB Program itself..*

- **Save the Patches** - and dump it the Synth

- **Load hundrets of Patches via received Program Change + the Bank-CC (CC32)**

- **Save Patches vie CC24 + CC value 0-127... when sending before a BankCC32 you can expand that..**

- Record CC-Motion-Sequences **use a footpedal connected to FSW1 on the backside of the BCR, to ARM/Disarm it... so you can tweedle 2 ore more CC @ once... but you dont have to, BCR-onboard is also a Button for it**

- PLAY Motions-Sequences, **up to 256 steps @ 32th rate... this steps of course are only right when you have choosen 4/4 in your Patch... elsewhere of course will differ a bit...but 256 is max.**

- VELOCITY MORPH **Add Velocity-Ammount to CCs**

- MERGE incoming Midi-Notes/Clock/Pitchbend with Automated CCs.

- Set Sequencer Beatstructure » **how to interpret Clock-ticks (4/4, 5/4, 6/4, 7/4...)**

- **A Global Page: for example you use 8 simular Drum-Voices, with the Global you have 8 channel strips with dedicated Controlls, for example: 8xVolume, 8xTone/Noise-Mix,**

8xDistortion, 8xClick

if you have one Synth over 2 MSQ_CC_BCR Tracks(booth set to MidiChannel 0, to get 64CCs instead of 32), then the Global Page: have the ability to show/edit a parameter from Track1Voice on Track1Global, and from Track2Voice on Track2Global... it depends how you set the Midichannel in the Systemsettings (which are currently in the CODE itself (recompile

- Many of this features, especially the System Settings would need a UI, but that would it make bigger, more expensiv, and maybe more complex to use... & this case is UI-less - it is set once, for one multipart-synth+bcr2000, MSQ_CC_BCR do all the Preset Store, and Automations, so it is one Unit > to use the Unit in a other way would make all the Patches (1000Patches+3000 Variants) useless, so once done, it is a black box loadet via

Programchange! ... it is not that i cant program a good UI 😊, minimal is better here, there will be other MSQ outthere, be prebered for the MSQ_CC_2xLRE & MSQ_CC_ELO
===== Hardware Requirements ===== External Requirement:(for example) *

Melody/Clock Source with ProgramChange-Output: [midibox_seq_v4l](#) oops that dont do PC...

* Melody/Clock Destination: NordDrum 2

* Midicontroller: 1x BCR2000 Midibox:

* [core32](#)



* [1xMidi IO](#) connect 1 midicontroller and 1 Note/Clock-Source/Destination

* SD-Card, formatted with FAT32, and the file "bcr1.syx" on it

* Soldering Iron, Wires, PCB....

* USB Power Supply... I tried to use the Midi-BUS-Power from BCR2000 but it is too weak!

Visual Feedback directly from MBHP * a Momentary Switch Connected to J5A Pin0 * 7 LEDs in serial with 220Ohm each to GND connected to J5A Pin1-3 and J5B Pin0-4 The LEDs show via Gestic (Patterns) if something is wrong, done, busy, & show the Rythm structure: The Switch switches as Radio-Button thru the Rythm Structures (4/4, 5/4...), the LED-Indicating this. By Holding the Switch and Powering the Core, it will Dump Out a Sysex Template to

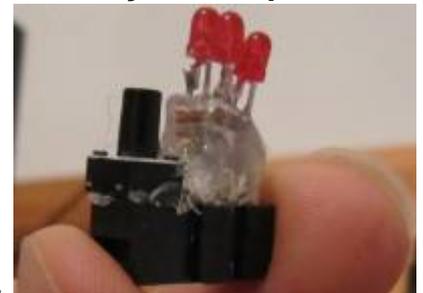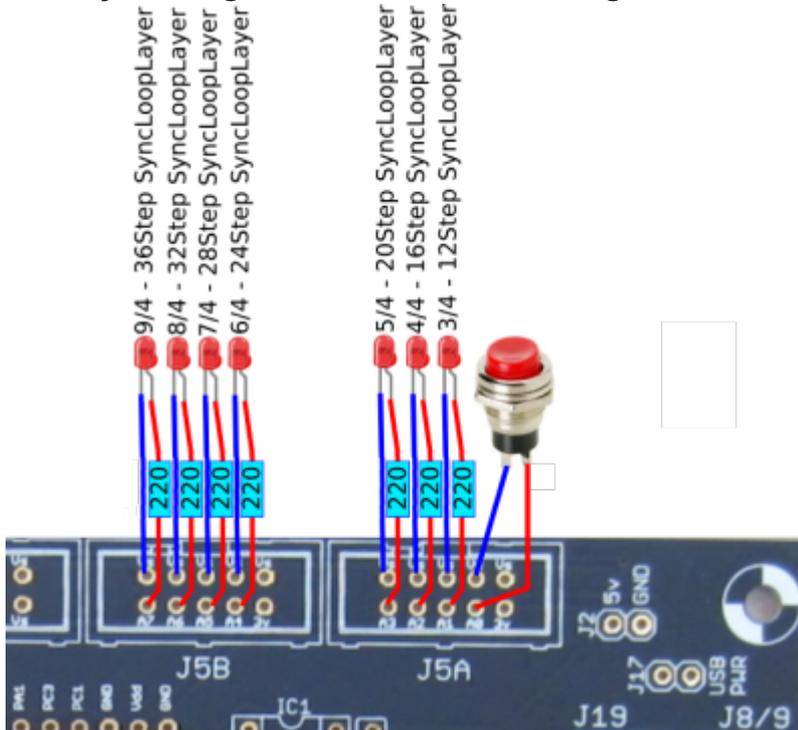

your BCR.



=====

Why BCR2000 ===== because I have 3 of them but they are to old dirty, damaged... i cant get a good price for it, so better hold it and make

something with it.

===== Setting up a BCR2000 ===== == Cabeling == MidilO Porta Out >> BCR Midi IN AFTER Uploading the Sysex, and restarting the BCR connect:

MidilO Porta In >> BCR Midi OUT A

== Upload the Sysex-Template == 1. unpack [bcr1.syx.zip](#) and put "bcr1.syx" on a SD-Card (root level)

2. Put SD-Card into CORE32

3. bridge J5A Pin0 to ground, or connect a switch to it, that you will need if you want to sequence other song structures then 4/4 (which is default)!

4. Power the core up.


...if the filestructure (patches) are already existent...then it takes less then half a minute to dump the BCR-2000 Layout Data...

You dont have to save the preset, it will make it automatic

...when no filestructure... then it will take about 16minutes... the core has to make 4000Patches*32KB=139MB!!!!... so better:

* Faking a filestructure: make a empty folder "mq" and put it on SD-Card, make the syx.dump, make your first simple standart patch, the sound you will start with...to the next 1000 Patches ;) so choose carefully, young jedi... then remove the Card, earse the "mq" folder on the card, and put it into the core again, now it will copy your "standart patch" to 4000 others

==== Frontpanels ==== === BCR2000 Stickers === The Blue Elements are the MBHP Remotes... the Rest is for the Synth

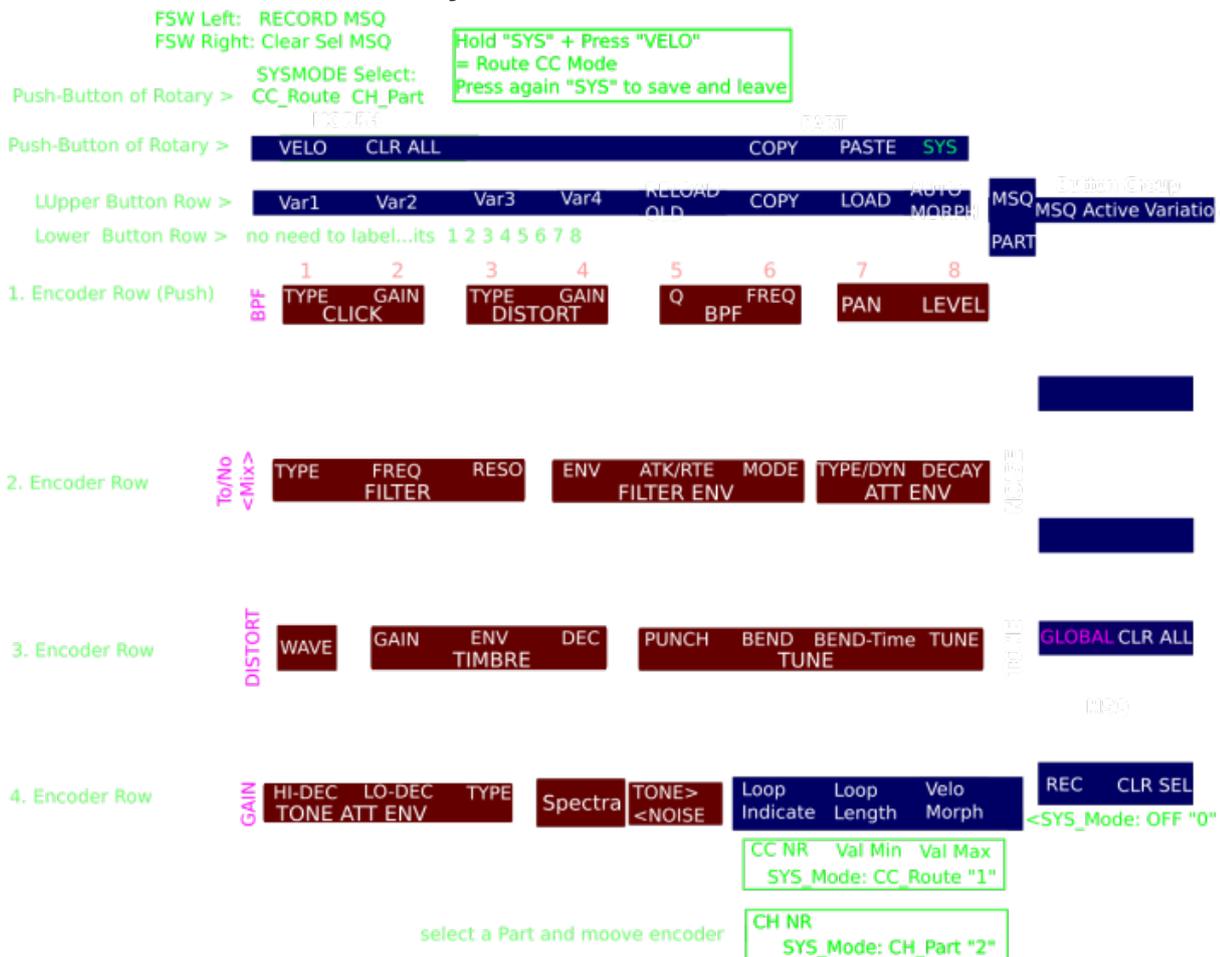

UNTESTET, NOT SCALED!!!!

In Order to better understand the Routing of the Internal CCs to externals:

Deep Edit Mapping

PART 1-6 Nord Drum2

Click		Distortion		BPF		Attenuator		MASTER	Group	
Type	Gain	Type	Gain	Q	Freq	Pan	Level		Label	
57	56	24	23	26	25	10	7		CC-Nr-Synth	255: „not used“
0	0	0	0	0	0	0	0		Min Value	
127	127	127	127	127	127	127	127		Max Value	
0	1	2	3	4	5	6	7	CC-Nr-BCR		

Filter		Filter Envelope			ATT-ENV			NOISE	Group	
Type	Q	Frequency	ENV	ATK/RTE	MODE	TYP/DYN	DECAY		Label	
15	17	14	16	18	19	20	21 oder 22?		CC-Nr-Synth	255: „not used“
0	0	0	0	0	0	0	0		Min Value	
127	127	127	127	127	127	127	127		Max Value	
8	9	10	11	12	13	14	15	CC-Nr-BCR		

TIMBRE			TUNE				TONE	Group		
WAVE	Gain	ENV	Decay	Punch	Bend	Bend Time		Tune	Label	
46	52	53	47	48	54	55		1277	CC-Nr-Synth	255: „not used“
0	0	0	0	0	0	0		LSB61	Min Value	
127	127	127	127	127	127	127		MSB31	Max Value	
16	17	18	19	20	21	22	23	CC-Nr-BCR		

TONE ATT ENV TONE			TONE	<MIX>	Motion Sequencer			TONE & MIX	Group	
HI-Decay	LO-Decay	Decay Type	Spectra	Tone/Noise	Indicator	Length	Morph		Label	
50	51	49	30	58	255	255	255		CC-Nr-Synth	255: „not used“
0	0	0	0	0	0	0	0		Min Value	
127	127	127	127	127	127	127	127		Max Value	
24	25	26	27	28	29	30	31	CC-Nr-BCR		

Channel Strip Mapping

each Vertical Row can be thought copied 8 times per Map, i just wrote them on one Sheet to see what each Map can do

Channel Strip 1 - Mixer

Click	Noise Filter	Noise						Group	
Gain	Q	LO-Decay							Label
1	8	15				255	255		Re-Map
0	1	10	3	4	5	6	7	CC-Nr-BCR	

<MIX>	Noise Filter	Timbre						Group	
Noise/Tone	Frequency	LO-Decay							Label
28	9	19				255	255		Re-Map
8	9	10	11	12	13	14	15	CC-Nr-BCR	

Distortion	BPF	Tone						Group	
Gain	Q	HI-Decay							Label
3	4	24				255	255		Re-Map
16	17	18	19	20	21	22	23	CC-Nr-BCR	

Attenuator	BPF	TONE						Group	
Level	Freq	LO-Decay							Label
7	5	25				255	255		Re-Map
24	25	26	27	28	29	30	31	CC-Nr-BCR	

==== MBHP ===== Software ===== Firmware ===== V1. from 17.02.2018msq_cc_bcr_v1.norddrum2.zip hardcodet for a NordDrum2 (also newest sysex for the BCR includet) ===== CC Routing to Synths ===== MSQ_CC_BCR internal i have 8x32 CCs, they are always identical. but with a simple input output matrix i can decide which CC it gets in real world. each of the 8 Part can have midichannle 0-15... So we talking about Mapping... in the moment it is made in the source code with a simple array. this array could be saved and loadet from SD-Card aka



“SYS settings”, and this array could be editet by a simple editor... i dont have a glue about this, nor time no interest in doing this... but the format of this setting is very simple, the file starts with (converted from hex) mq04 and then the Routing array starts [32][127] for those how know how to program a simple interface for it? ===== To Do ===== Nothing it is done! maybe scale min max values for CCs »> for example different synths have only 0-3value instead of 0-127, by different functions like WAVEFORM...) - this will be interesting when using other synths then nord drum...

- ===== Resources ===== [BCR-Manual](#)
- [BCR-SYSEX-GUIDE](#)
- [TOKEN-Reference](#)

BC-Convert Convert SYX into Textfile to Edit and reverse... better then every BCR Editor! But Windows only... i run a oracle virtualbox with a VM-W7 under Linux, with a shared folder ===== Community users working on it ===== * **Phatline**** = Programming, Documentation...
Just let a Private message on the forum to user already involved, the sourcecode is includet in the firmware .zip!!!

From:

<https://midibox.org/dokuwiki/> - **MIDIbox**

Permanent link:

<https://midibox.org/dokuwiki/doku.php?id=msq-cc-bcr&rev=1518834649>

Last update: **2018/02/17 02:30**

